

BRUKSANVISNING  
INSTRUCTION MANUAL  
**NAMRON MERKUR 275 DIM**









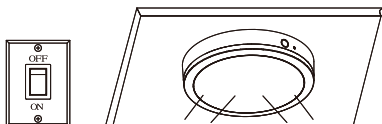
**namron**

220-240V~ 50/60Hz IP65

IP65 CE □ 

Effekt:	12W	Power:	12W
Spenning:	200-240V AC 50Hz	Input voltage:	200-240V AC 50Hz
Lysutbytte:	1083/1104/1094lm	Light output:	1083/1104/1094lm
Fargetemperatur:	3000/4000/5700K	Color temperature:	3000/4000/5700K
CRI:	>80	CRI:	>80
Kapslingsgrad:	IP65	Ingress protection:	IP65
Slagfasthet:	IK10	Impact resistance:	IK10
Drifttemperatur:	-20 – 45°	Operating temperature:	-20 – 45°
Materiale:	Polykarbonat	Material:	Polycarbonate
Dimbar:	Ja	Dimmable:	Yes
Levetid:	50.000t	Lifetime:	50,000h

**MONTERING/MOUNTING**

<p><b>1</b></p>  <p>Take out the lamp and accessory pack.</p>	<p><b>2</b></p>  <p>Take the lamp cover and lamp shade apart by rotating it in anti-clockwise direction.</p>	<p><b>3</b></p>  <p>Knock-in the plastic anchor into ceiling through the lamp base.</p>	<p><b>4</b></p>  <p>Pass wires through the lamp, fix the lamp into ceiling by screws.</p>
<p><b>5</b></p>  <p>Feed the AC wire into terminal block respectively; If with 3CCT changeable function, choose preferred CCT by slide switch.</p>	<p><b>6</b></p>  <p>Plug the male and female connector. Align the arrow on the lamp cover with the lamp body arrow, fasten it and then fix the lamp shade with screws.</p>	<p><b>7</b></p>  <p>Align the hook of frame to lamp body holes, clip into the lamp body, and then rotate the frame clockwise until they match well, fix frame with screw.</p>	<p><b>8</b></p>  <p>Lock the anti-theft screws on side.</p>
<p><b>9</b></p>  <p>Switch on.</p>			

**TIL INFORMASJON**

1. Skal installeres av autorisert el-installatør.

**ADVARSEL**

1. Produsenten vil ikke holdes ansvarlig for feil installasjon, gal eller upassende bruk og uautorisert forandring av armaturen. Feil som oppstår på grunn av ovennevnte advarsler kan resultere i alvorlige skader på personer, dyr eller gjenstander.
2. Hvis forandringer på produktet er nødvendig, konsultere forhandler for råd.
3. Dersom skader på armaturen oppstår, vennligst erstatt med originaldeler før bruk.  
Lyskilden til denne armaturen er ikke utskiftbar. Når lyskilden slutter å virke, må hele armaturen skiftes ut.

**FOR INFORMATION**

1. Installation must be performed by a qualified electrician.

**WARNING**

1. The manufacture will not be held responsible for improper installation, faulty or improper use and unauthorized alteration of the luminaire. Errors that occur because of the above warnings can result in serious injury to persons, animals or objects. If changes of the product is required, consult the dealer for advice.
2. If damage of the luminaire occurs, please replace with the original parts before use.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.