

## ALFA REFLEKTOR SOFT WARMDIM

220-240V~50/60Hz LED 10W 220mA IP44










Downlighten kan dimmes ned helt flimmerfritt.  
Lav høyde. Ekstern driver med hurtigkobling for raskere og enklere installasjon. Dimbar med faseavsnitt dimmer. Kan monteres direkte i isolasjonsmatter. Enkel installering. Monteres uten verktøy.


The downlight is dimmable all the way down completely flicker-free.  
Low altitude. External driver with quick connector for faster and easier installation. Dimmable with trailing edge dimmer. Can be mounted direct into insulation sheet. Easy installation. Mounting without tools.

|                  |  |
|------------------|--|
| Total Effekt:    | 10W  |
| LED effekt:      | 8,3W   |
| Lumen chip:      | 770lm  |
| Lumen downlight: | 680lm  |
| Effektivitet:    | 68lm/W   |
| Ra:              | 95+  |
| R9:              | ≥90  |
| SDCM:            | ≤3   |
| LED Chip:        | Bridgelux  |
| Fargetemperatur: | 2800-2000K (med dimming)   |
| Lysspredning:    | 35°  |
| Tetthetsgrad:    | IP44   |
| Levetid:         | 50.000 timer L90B10<br>80.000 timer L80B50<br>120.000 timer L70B50 |


|                     |  |
|---------------------|--|
| Total Power:        | 10W  |
| LED power:          | 8,3W   |
| Lumen chip:         | 770lm  |
| Lumen downlight:    | 680lm  |
| Efficacy:           | 68lm/W   |
| Ra:                 | 95+  |
| R9:                 | ≥90  |
| SDCM:               | ≤3   |
| LED Chip:           | Bridgelux  |
| Colour Temperature: | 2800-2000K (with dimming)  |
| Beam Angle:         | 35°  |
| IP Rating:          | IP44   |
| Lifetime:           | 50,000 hours L90B10<br>80,000 hours L80B50<br>120,000 hours L70B50 |

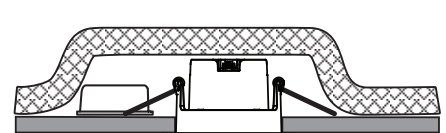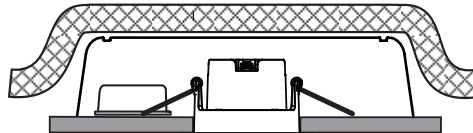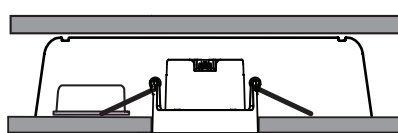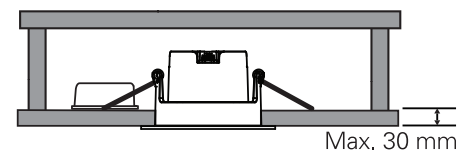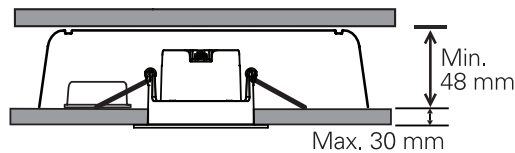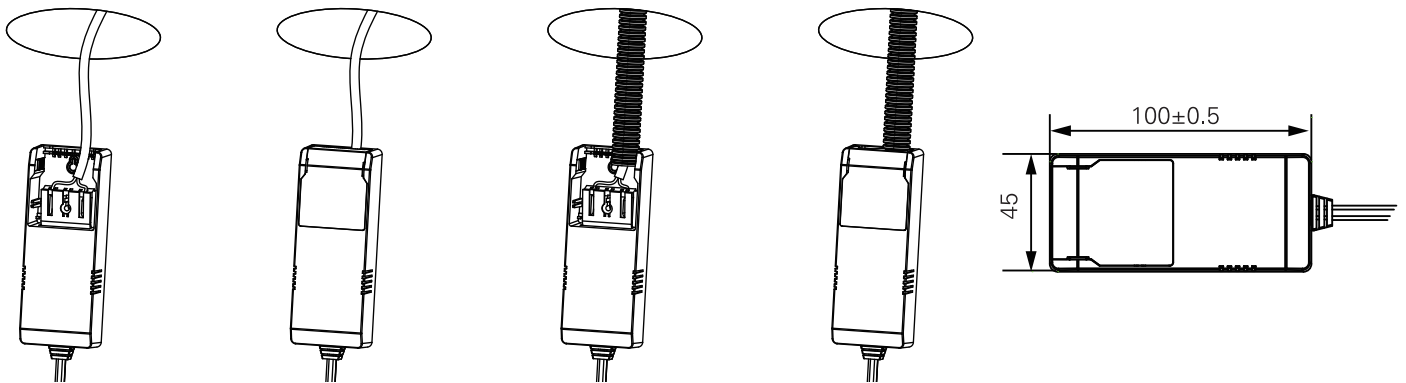

### MÅL / MEASURES

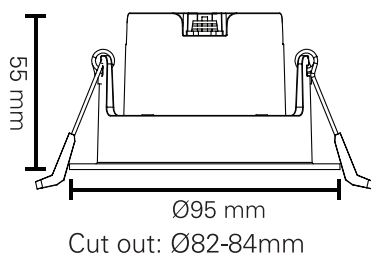

Minimumsavstand til brennbart materiale i armaturens stråleretning. /  
Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.  
Must be installed by registered electrical company.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: se tabell eller merkelapp.  
This product contains a light source of energy efficiency class: see table or label.

| El-nr   | Produkt  | Effekt(W) | energieffektivitetsklasse forlys |
|---------|--|-----------|----------------------------------|
| 3220266 | ALFA REFLEKTOR SOFT WARMDIM 10W IP44 MATT SORT | 10        | F                                |
| 3220264 | ALFA REFLEKTOR SOFT WARMDIM 10W IP44 MATT HVIT | 10        | F                                |

Max. luminaires per circuit breaker:

| Type B |     |     | Type C |     |     |
|--------|-----|-----|--------|-----|-----|
| 10A    | 16A | 20A | 10A    | 16A | 20A |
| 115    | 184 | 230 | 127    | 204 | 255 |